

## PLASTIC ROTAMETERS




- plastic rotameters with screw connections  
(on demand it is possible to change the connection type)
- vertical installation
- accuracy class: 4%
- permissible conditions:
  - a) max working pressure: 0,6 MPa
  - b) max temperature: 333 K
- float material: ABS, pipe material: polycarbon
- direct reading on scale




DN (mm)	Measuring range water m <sup>3</sup> /h	Connection type	
15	10 – 100 l/h 16 – 160 l/h 25 – 250 l/h 40 – 400 l/h 60 – 600 l/h 100 – 1000 l/h	R 1/2" R 3/4"	
25	0,1 – 1 0,16 – 1,6 0,25 – 2,5	R 3/4"	
32	0,4 – 4 0,6 – 6	R 1"	
50	0,4 – 4 0,6 – 6 1 – 10 1,6 – 16	R 2"	
65	5 – 25 8 – 40 12 – 60	R 2 1/2"	
65	5 – 25 8 – 40 12 – 60	flange connection	distance of center hole: 180 mm
125	25 – 150 30 – 180	65	distance of center hole: 210 mm
150	12 – 60 18 – 90 20 – 120 25 – 150 30 – 180	65	distance of center hole: 240 mm

DN (mm)	Dimensions (mm)			
	L	B <sub>1</sub>	B <sub>2</sub>	B <sub>3</sub>
15	220	20	26	51
25	230	32	39	60
32	29a0	40	49	72
50	350	63	73	98
65	420	75	88	122
100	547	-		
125	547			
150	547			

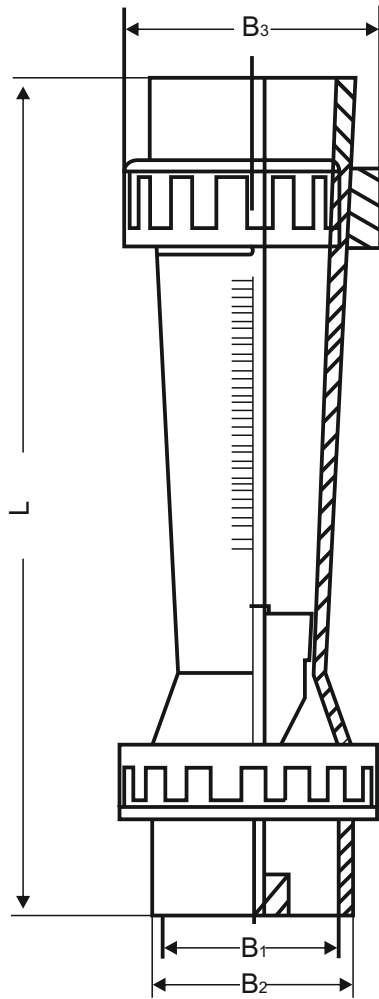

**DN: 15~65**

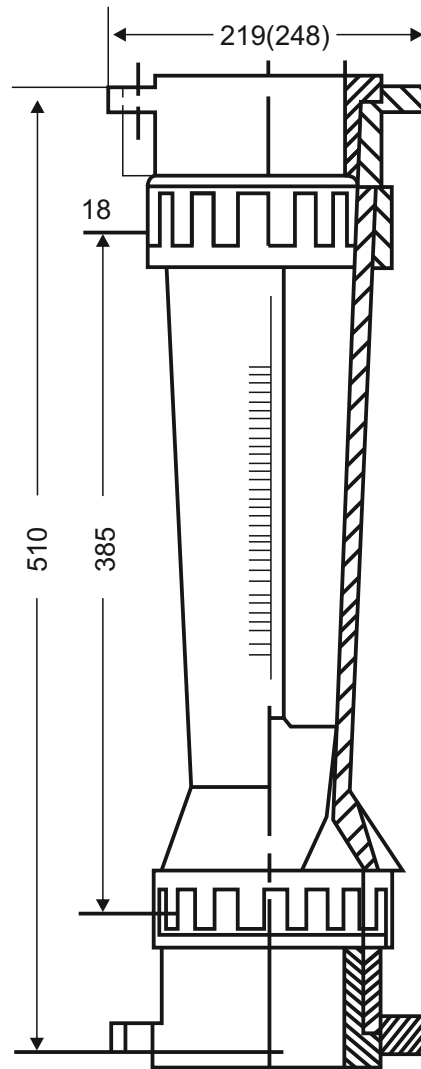

**DN: 100(125)**